

RIDING LAWN TRACTORS

100, 200, X300, X500, AND X700 Series



JOHN DEERE



FROM MOW TO SNOW.

View Our Snow Removal Equipment Inside

RIDING LAWN TRACTORS

TAKE THE HARD WORK OUT OF LAWN WORK.

Make the most of your mowing, and more. Our lawn tractors handle any job on your to-do list. Haul, plow, bag, or mulch—with our range of attachments and options, you can count on a quality cut all year round.



The Accel Deep™ mower deck. Tough with a precision cut. The Accel Deep mower decks provide a superior cut quality. The deep deck design creates a vacuum force that lifts every blade of grass for a smooth, even cut. Plus, These 48- and 54-inch (122-cm and 137-cm) wide mowers are forged from a heavy-duty 10-gauge steel for maximum durability. That's the same thickness used to make safes.



MulchControl™ kit with one touch technology. Mulch on. Mulch off. Mulch the easy way with the push of a button. Available with Accel Deep™ mower decks on Select Series Tractors.



Great lawn care has gone high tech.

The John Deere Equipment Mobile app helps keep your John Deere riding lawn equipment running well and your lawn looking great. Available at the App Store® or Google Play™ store. US only.

App Store is a registered trademark of Apple Inc.
Google Play is a trademark of Google LLC.



KEEP SAFETY TOP OF MIND

As you explore our riding lawn tractors lineup, remember that each model has different features and slope operating limits. Choosing the right lawn tractor for your terrain is essential—not all areas are suitable for riding lawn tractors, and understanding your machine's capabilities helps ensure safe, efficient operation.

Riding lawn tractors in one series may have different slope operating limits than those in another series. For example, the 100 and 200 Series Riding Lawn Tractors have slope operating limits of 13 degrees while the X300 and X500 Series Riding Lawn Tractors have slope operating limits of 15 degrees. For more information on slope operating limits, see Operator's Manual.



Cutting height adjuster. Cutting height can be adjusted in 1/4-inch (0.64-cm) increments for a precise, even cut.



Twin Touch™ system. Twin Touch automatic transmission lets you easily change from forward to reverse with two-pedal foot control for effortless speed and direction changes. (Available on Select Series and Signature Series Tractors.)



30-second oil change system. Groundbreaking. We've changed the oil change with the John Deere Easy Change™ 30-second oil change system* on select 100 Series models.

*Changing the filter removes the captured contaminants and replaces about 0.8 qt (0.76 L) of engine oil.

X700 SIGNATURE SERIES

Engine – High-performance electronic fuel injected (EFI) gas engines and Final Tier 4 diesel engines offer torque and power to spare.

Optional MulchControl kit – Mulch the easy way—with the flip of a lever.

Steering wheel – Standard tilt steering adjusts to your height and delivers the ultimate in comfort.



Air ride seat option – Effortlessly adjust the seat suspension to your liking with the flip of a switch.



Stylish hood – The exclusive design provides excellent cooling and durability.

Mower deck – The 48-inch (122-cm) Accel Deep™ mower deck is perfect for narrow pathways and gate entrances, while our 54- and 60-inch (137- and 152-cm) high-capacity decks are solid stamped out of 9-gauge steel.

12-volt outlet – Plug in a sprayer or an electric spreader.

Tool box – Storage for work gloves, sunglasses, or your cell phone.

Power steering – Easily maneuver throughout your yard. Power steering is standard on all X700 Series.



Tough with a precision cut. The Accel Deep™ mower decks provide a superior cut quality. The deep deck design creates a vacuum force that lifts every blade of grass for a smooth, even cut. Plus, these 48- and 54-inch (122-cm and 137-cm) wide mowers are forged from a heavy-duty 10-gauge steel for maximum durability. That's the same thickness used to make safes.



The dashboard approach. Electronic fuel gauge, engine temperature gauge, tachometer with Best Cut target zone, and electric power take-off (PTO) engagement indicator—all at a glance and within easy reach.

THERE'S ALWAYS SOMETHING TO DO AROUND THE YARD.

Productivity and versatility are key to how we run, too. That's why the Signature Series is engineered to till, mulch, haul, bag, plow, fertilize, seed, sweep, and of course, mow. You just need the right attachment or implement.

Adding a 3-point hitch is a great place to start. Put our heavy-duty transmission and thick C-channel frame to the test and take on the toughest yard jobs. That's how we run. Nothing runs like a Deere.

BUMPER-TO-BUMPER **4-YEAR /700-HOUR** **WARRANTY***

*Term limited to 4 years or 700 hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or JohnDeere.ca/TUWarranty for details.



With an AutoConnect™ deck, attaching and removing your mower deck is easier than ever. Drive-over ramps can quickly be removed—without tools—for access to the mower deck.



Take command of every cut with power steering and lift, plus responsive Twin-Touch™ pedals that let you easily go forward and reverse.

X500 SELECT SERIES




MULTI-TERRAIN AND MULTI-TALENTED.

The X500 Series lets you mow with precision, faster. But a quality cut is just the start of what the tractors can do. Tow a cart or mulch your lawn, negotiate muddy areas with complete confidence, and go where you need to go. Heavy-duty frames support heavy-duty work. Increase traction with foot-operated traction control. Add the optional MulchControl kit to make feeding your lawn a snap.



High-back comfortable seat. Features a 4-bar scissor suspension that completely lifts seat platform and soaks up impact from bumpy terrain for a smooth, comfortable ride. Standard on the X580, X584, X590.

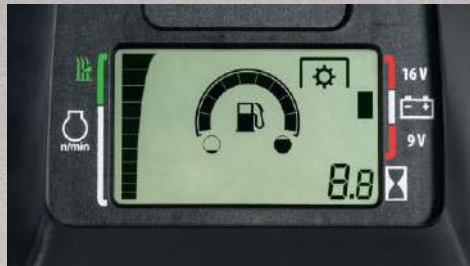

Easy-to-read display. Displays engine speed and target zone for best cut quality.



Traction assist. Locks the rear transaxle, so both rear wheels work together with maximum traction. Exceptionally effective at climbing or negotiating muddy ground.

Hydraulic power steering

Makes 4-wheel steering even easier and provides excellent maneuverability. 12-inch (30 cm) uncut circle radius on the X584 with 54-inch (137.16 cm) mower. (Standard on the X580, X584, X590.)

Four-wheel steering

All four wheels on the X584 steer the tractor for ultimate trimmability.

MulchControl kit with one touch technology

Available with Accel Deep™ mower decks on Select Series Tractors.

Accel Deep mower decks

The deeper "draw" and flat top design create a better quality of cut at faster ground speeds.

21-inch (53 cm) Cut-&-Sew seat

A spring suspension provides a smooth, comfortable ride on uneven terrain (Standard on the X580, X584, and X590).

Control console

Ergonomic design and color-coded for easy identification.

X590 electronic throttle control

Instantly responds to deliver engine power and eliminate bogging down.

iTorque™ power system

Provides plenty of power and torque for excellent performance in any operating condition.

BUMPER-TO-BUMPER
4-YEAR /500-HOUR
WARRANTY*

*Term limited to 4 years or 500 hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or JohnDeere.ca / TUWarranty for details.

X300 SELECT SERIES

PERFORMANCE MEETS POWER.

Get a beautiful cut in a matter of minutes with the X380 Lawn Tractor. With the comfortable 18-inch (46-cm) Cut-&-Sew seat standard and optional 48- and 54-inch (122- and 137-cm) forged Accel Deep mower decks that cut clean, even passes at faster speeds. Add a utility cart to haul away most anything a lawn can throw at you.



Easy-to-read display. Displays engine speed and target zone for the best cut quality.



Exact adjust deck leveling system. This exclusive feature allows you to conveniently level the deck from just below the seat.



Twin Touch system. Automatic transmission lets you easily change from forward to reverse with two-pedal foot control.



BUMPER-TO-BUMPER

4-YEAR /300-HOUR

WARRANTY*

*Term limited to 4 years or 300 hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or JohnDeere.ca/TUWarranty for details.



Four-wheel steering. Designed for ultimate trimmability. All four wheels steer the tractor instead of just the front two. Available on X354, X384, X394.



Rear collection. For the cleanest looking lawns, choose either a bagger attachment or the custom-engineered X350R dedicated rear-bagging tractor.



MulchControl kit with One-Touch Technology. Cut grass clippings down to size so they are easily absorbed in your lawn—or side discharge or bag.

200 SERIES

PREMIUM PERFORMANCE MAKES THE JOB EASY.

The 200 Series comes loaded with everything to make lawn care a labor of love. The comfort of a wide, welcoming operator station and premium seat option. Easy-to-operate, side-by-side forward and reverse pedals. A rip-roaring V-Twin engine. Accel Deep mower deck with optional MulchControl kit. The 48-inch. (122-cm) mower deck is forged from 10-gauge steel—the same thickness used to make safes. Ready to choose? Find the one that's perfect for you.

LED lights

Higher visibility in low light situations, these LEDs are aimed so you see what's in front of you. Better lighting and longer lasting than incandescent lights.

Premium seat available

Automotive style seat on the S240. Increased padding and Cut-&-Sew material for great feel and texture.

You can choose the mower deck size

Both the S220 and S240 come with an Accel Deep mower deck in either of two sizes, 42-inch (107-cm) or 48-inch. (122-cm). The deep "draw" and flat top design create a high quality of cut at faster ground speeds.

Fender flare design

Fender flares cover the tires more completely adding style and comfort. Available on the S240.

Side-by-side pedals

Side-by-side pedals for effortless speed and forward-to-reverse direction changes.

USB-C

The S240 features a covered console on the right fender that includes USB-C charging and protection for your digital phone.

Convenient mower deck lift lever

$\frac{1}{4}$ -inch. (0.64-cm) height-of-cut increment adjustment is as precise as ever, and oh, so easy.

Powerful, smooth running engine*

Premium V-Twin engines found in the Select Series models.

Turf-friendly tires

For a smooth ride and easy turns.



*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

BUMPER-TO-BUMPER 3-YEAR / 200-HOUR WARRANTY**

**Term limited to 3 years or 200 hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or JohnDeere.ca/TUWarranty for details.



EASY-READ FUEL GAUGE AT ARM'S REACH AND BEYOND EXPECTATIONS.

Always be in the know. The easy-read fuel gauge gives confidence in having enough gas to finish the job. The fuel level is easy to see on the dashboard in bright or low light, and it won't bounce around while driving. With an optional Smart Connector installed, the gauge updates the John Deere Equipment Mobile app about the fuel, battery state, engine hours, and more. Available on the S240.

100 SERIES

A woman with brown hair tied back, wearing safety glasses, a grey t-shirt, and blue jeans, is driving a green John Deere S120 lawn tractor. The tractor is positioned on a well-maintained green lawn. In the background, there is a dense green hedge and trees. To the right, a dark wooden planter box is visible. The tractor has a yellow seat, black steering wheel, and large black tires with yellow rims. The John Deere logo and 'S120' are visible on the side of the tractor.

YOUR LAWN WILL THANK YOU.

*Assembled in Greeneville, Tennessee, the 100 Series Lawn Tractors make up our affordable, comfortable, easy-to-use line-up. Loaded with features that keep your lawn looking sharp, handle snow removal in the winter, and help you take care of loads of other projects around your property. The result? Your property maintenance to-do list is done right the first time so you can lean back, smile, and take the credit.



Easy-read fuel gauge

No searching. No guessing. Know at a glance your fuel level for sure. (Available on S120, S130, S170, and S180.)



Premium seats

With a variety of seat options to choose from, you'll easily find the right padding, feel, and texture. Go ahead. Take a seat.



LED lights

Higher visibility in low light situations, these LEDs are aimed so you see what's in front of you. Better lighting and longer lasting than incandescent lights.



Electric PTO

Provides instant engagement of mower blades. (Available on all models from S130 and above.)



John Deere Easy Change™ 30-second oil change system***

No mess. No fuss. No problem. The oil and oil filter are all-in-one.* Twist. Lock. Done. (Available on S120, S130, S160, S170, S180.)



Ergonomic operation

Designed for easy, intuitive, and comfortable operation. Welcome to your new happy place.



The convenient mower deck lift lever

¼-inch. (0.64-cm) height-of-cut increment adjustment is as precise as ever.



Side-by-side pedals

Easily change from forward to reverse with two-pedal foot control available on all 100 Series Lawn Tractors.



Console with lid

A covered console on the right fender allows for enclosed, protected storage.

BUMPER-TO-BUMPER
2-YEAR /120-HOUR
WARRANTY**

*Assembled with foreign and domestic parts.

**Term limited to 2 years or 120 hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or JohnDeere.ca/TUWarranty for details.

***Changing the filter removes the captured contaminants and replaces about 0.8 qt (0.76 L) of engine oil.

X700 SIGNATURE SERIES
SNOW REMOVAL EQUIPMENT

HEAVY SNOWFALL MEETS ITS MATCH.



The 47- and 54-inch (119.4- and 137.2-cm) two-stage Quick-Hitch snow blowers let you easily lift and lower the blower with your tractor hydraulics. Add the optional remote deflector cap to place snow with your fingertips.



Get year-round usage with the 52-inch (132.1-cm) Quick Hitch rotary broom or 60-inch (152.4-cm) heavy duty broom. Both models feature floating heads to make a clean sweep of snow and slush-covered paths and driveways.



Optional ROPS hard-side cab, available on the X700 Series, ensures that the cold outside stays outside. Easy open and close doors latch and even lock. The front glass windshield wiper keeps your view clear during wet flurries.



The optional Quick Hitch will have you moving snow in minutes. Simply drive-in and attach the Quick-Hitch snow blower, front broom or blade, then hook up the hydraulics to the tractor, and you're done.

*X300 AND X500 SELECT SERIES
SNOW REMOVAL EQUIPMENT*

GO FROM MOW TO SNOW.



The X500 select series powerful 47-inch (119.4-cm) snow blower makes quick work of cleanup. A 200-degree chute rotation lets you change snow blowing direction as the wind shifts. Spout deflector helps you adjust snow throwing distance.

The X300 and X500 select series tractor's 44-inch (111.8-cm) snow blower clears large driveways quickly. Use the tractor's foot-pedal or hydraulic lift system to raise and lower the blower for easy re-positioning when clearing wide areas. Deflector cap can be adjusted from your seat.

Plow markers make maneuvering in deep snow easier. These reflective markers help provide visibility to the edge of your blade during swirling snowstorms.



Get year-round usage from the 44-inch (111.8-cm) front blade for the X300 series. A 3-inch (8-cm) floating action is built-in to allow the blade to follow the contour of the ground for complete cleaning action.

Heavy-duty 48-inch (122-cm) front blade for the X394 and X500 series clears the way. Blade can easily be angled from the comfort of your seat—choose from five positions.

Optional remote blade angling kit lets you easily angle the blade from the comfort of your seat on the go—a helpful feature when clearing wide driveways and paths.

100 AND 200 SERIES
SNOW REMOVAL EQUIPMENT

CLEAR THE WAY.
EVERY SEASON.



Ditch the shovel and save your back when clearing sidewalks and driveways with the **44-inch (110 cm) snow blower for 100 and 200 series tractors**. You can even stay seated while manually angling and rotating the chute.



Don't leave your 100 or 200 Series in the garage over winter, equip it with a **46-inch (120 cm) front blade** and you can push back on winter. This easy-to-use blade can be angled, lifted, and lowered from the seat.

ENHANCE YOUR EQUIPMENT



Whether you have a front blade or a snow blower, **tire chains** give you that extra bit of traction that's needed during slippery conditions.



Get the most out of your snow removal equipment by adding rear **suitcase weights**. Simply install a weight bracket and hook on the 42-pound, (19.1-kg) weights for extra traction in icy, snowy conditions.



Keep blowing snow and howling wind at bay with a **weather enclosure**. Zip up the doors and windows to keep Jack Frost from nipping at your nose.



Optional electric implement lift gives you fingertip control of raising and lowering your implements.

ATTACHMENTS

GET READY TO GET ATTACHED.

Keep your John Deere riding lawn tractor busy all year—even when your lawn is covered in snow. Our incredible spectrum of attachments can practically transform your mower into a different machine. Bagging or spreading. If you've got the task, we've got the attachment.



Spreader

Whether you're spreading lime or fertilizer, you can comfortably get your lawn in perfect shape while staying seated with a spreader. Choose from broadcast tow-behind spin spreaders or tractor-mounted drop spreaders.



Utility Cart

No more trips back and forth when updating garden beds and working on large yard projects. Simply hook up a utility cart to your rear tractor hitch and start hauling mulch, flowers, and more. Choose from a wide range of carts with capacities from 7 up to 17 cu ft (.20-.48 m³).



2-Bag Bagger

Leave a clipping-free finish or take on those pesky fall leaves with a 2-bag, 6.5-bushel (229-L) bagger. Rear hopper opens to reveal two easy-to-remove bags. Handle on bottom of bags makes easier emptying. No-tools installation ensures you can get the bagger on and off yourself.

Specifications

X730

X734 (4WS)

X738 (4WD)

POWER SYSTEMS

Model Number	FD750D EFI iTorque™ Power System	FD750D EFI iTorque™ Power System	FD750D EFI iTorque™ Power System
Engine Power	25.5 hp* (19 kW)	25.5 hp* (19 kW)	25.5 hp* (19 kW)
Displacement	45.5 cu in. (745 cc)	45.5 cu in. (745 cc)	45.5 cu in. (745 cc)
Cooling	Liquid	Liquid	Liquid
Cylinders	V-Twin	V-Twin	V-Twin

SLOPE

Slope Operating Limit***	18 degrees	18 degrees	18 degrees
--------------------------	------------	------------	------------

FUEL SYSTEM

Capacity	5.2 U.S. gal. (19.7 L)	5.2 U.S. gal. (19.7 L)	5.2 U.S. gal. (19.7 L)
Fuel Type	Gasoline	Gasoline	Gasoline

IGNITION

	Electronic	Electronic	Electronic
Electrical System	20 amp, regulated	20 amp, regulated	20 amp, regulated
Fuel Delivery System	Electronic fuel injection	Electronic fuel injection	Electronic fuel injection

TRANSMISSION

Drive System	Hydrostatic, 2-wheel drive	Hydrostatic, 2-wheel drive	Hydrostatic, Full-time 4-wheel drive
Forward Speed	8.5 mph (13.7 km/h)	8.5 mph (13.7 km/h)	8.5 mph (13.7 km/h)
Reverse Speed	6 mph (9.7 km/h)	6 mph (9.7 km/h)	6 mph (9.7 km/h)

BRAKES

	Internal wet disc	Internal wet disc	Internal wet disc
--	-------------------	-------------------	-------------------

STEERING

	Power, 2-wheel steer	Power, 4-wheel steer	Power, 2-wheel steer
--	----------------------	----------------------	----------------------

TURNING RADIUS

	25 in. (63.5 cm)	21 in. (53.3 cm)	25 in. (63.5 cm)
--	------------------	------------------	------------------

UNCUT CIRCLE RADIUS

	28 in. (71.1 cm) w/ 60-in. HC Mower	6 in. (15.2 cm) w/ 60-in. HC Mower	28 in. (71.1 cm) w/ 60-in. HC Mower
--	-------------------------------------	------------------------------------	-------------------------------------

SEAT

	21 in. (53.3 cm) 2-piece adjustable back angle	21 in. (53.3 cm) 2-piece adjustable back angle	21 in. (53.3 cm) 2-piece adjustable back angle
--	--	--	--

TIRES

Front	Turf 18x8.50-8	Turf 18x7.00-8	Heavy-Duty All Purpose 18x8.50-10
Rear	Turf 26x12-12	Turf 26x10.50-12	Heavy-Duty All Purpose 26x12-12

LIFT SYSTEM

	Power	Power	Power
--	-------	-------	-------

PTO

	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch
--	------------------	------------------	------------------

DIMENSIONS

Height (Seat Height)	54.5 in. (138.4 cm)	54.5 in. (138.4 cm)	54.5 in. (138.4 cm)
Length, Overall	75 in. (190.5 cm)	75 in. (190.5 cm)	75 in. (190.5 cm)
Min. Storage Width (Chute Up)	62 in. (157.5 cm) w/ 60-in. Mower	57.5 in. (146.1 cm) w/ 54-in. Mower	62 in. (157.5 cm) w/ 60-in. Mower
Wheelbase	54.5 in. (138.4 cm)	54.5 in. (138.4 cm)	55.7 in. (141.5 cm)
Weight, Approx.	1,078 lb (489 kg) w/ 54-in. Mower	1,133 lb (514 kg) w/ 54-in. Mower	1,168 lb (530 kg) w/ 54-in. Mower

MOWER OPTIONS

	Forged 48 in. (121.9 cm) Accel Deep™ Mower	Forged 48 in. (121.9 cm) Accel Deep™ Mower	Forged 48 in. (121.9 cm) Accel Deep™ Mower
Cutting Width	54 in. (137.2 cm) High Capacity	54 in. (137.2 cm) High Capacity	54 in. (137.2 cm) High Capacity
	60 in. (152.4 cm) High Capacity	60 in. (152.4 cm) High Capacity	60 in. (152.4 cm) High Capacity

BUMPER-TO-BUMPER WARRANTY**

	4 year / 700 hours	4 year / 700 hours	4 year / 700 hours
--	--------------------	--------------------	--------------------

* The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information.

** Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or www.JohnDeere.ca/TUWarranty for details.

*** Attachments may reduce Slope Operating Limit. See Operator's Manual.



X739

(4WD, 4WS)

X750

X754

(4WS)

X758

(4WD)

FD750D EFI iTorque™ Power System	3TNM74F 3-cylinder Diesel	3TNM74F 3-cylinder Diesel	3TNM74F 3-cylinder Diesel
25.5 hp* (19 kW)	24 hp* (17.9 kW)	24 hp* (17.9 kW)	24 hp* (17.9 kW)
45.5 cu in. (745 cc)	60.6 cu in. (993 cc)	60.6 cu in. (993 cc)	60.6 cu in. (993 cc)
Liquid	Liquid	Liquid	Liquid
V-Twin	3	3	3
18 degrees	18 degrees	18 degrees	18 degrees
5.2 U.S. gal. (19.7 L)	5.2 U.S. gal. (19.7 L)	5.2 U.S. gal. (19.7 L)	5.2 U.S. gal. (19.7 L)
Gasoline	Diesel	Diesel	Diesel
Electronic	N/A	N/A	N/A
20 amp, regulated	40 amp, regulated	40 amp, regulated	40 amp, regulated
Electronic fuel injection	Indirect injection	Indirect injection	Indirect injection
Hydrostatic, Full-time 4-wheel drive	Hydrostatic, 2-wheel drive	Hydrostatic, 2-wheel drive	Hydrostatic, Full-time 4-wheel drive
8.5 mph (13.7 km/h)	8.5 mph (13.7 km/h)	8.5 mph (13.7 km/h)	8.5 mph (13.7 km/h)
6 mph (9.7 km/h)	6 mph (9.7 km/h)	6 mph (9.7 km/h)	6 mph (9.7 km/h)
Internal wet disc	Internal wet disc	Internal wet disc	Internal wet disc
Power, 4-wheel steer	Power, 2-wheel steer	Power, 4-wheel steer	Power, 2-wheel steer
21 in. (53.3 cm)	25 in. (63.5 cm)	21 in. (53.3 cm)	25 in. (63.5 cm)
6 in. (15.2 cm) w/ 60-in. HC Mower	28 in. (71.1 cm) w/ 60-in. HC Mower	6 in. (15.2 cm) w/ 60-in. HC Mower	28 in. (71.1 cm) w/ 60-in. HC Mower
21 in. (53.3 cm) 2-piece adjustable back angle	21 in. (53.3 cm) 2-piece adjustable back angle	21 in. (53.3 cm) 2-piece adjustable back angle	21 in. (53.3 cm) 2-piece adjustable back angle
Heavy-Duty All Purpose 18x8.50-10	Turf 18x8.50-8	Turf 18x7.00-8	Heavy-Duty All Purpose 18X8.50-10
Heavy-Duty All Purpose 26x12-12	Turf 26x12-12	Turf 26x10.50-12	Heavy-Duty All Purpose 26x12-12
Power	Power	Power	Power
Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch
54.5 in. (138.4 cm)	54.5 in. (138.4 cm)	54.5 in. (138.4 cm)	54.5 in. (138.4 cm)
75 in. (190.5 cm)	75 in. (190.5 cm)	75 in. (190.5 cm)	75 in. (190.5 cm)
57.5 in. (146.1 cm) w/ 54-in. Mower	62 in. (157.5 cm) w/ 60-in. Mower	57.5 in. (146.1 cm) w/ 54-in. Mower	62 in. (157.5 cm) w/ 60-in. Mower
55.7 in. (141.5 cm)	54.5 in. (138.4 cm)	54.5 in. (138.4 cm)	55.7 in. (141.5 cm)
1,255 lb (569 kg) w/ 54-in. Mower	1,163 lb (528 kg) w/ 54-in. Mower	1,218 lb (552 kg) w/ 54-in. Mower	1,253 lb (568 kg) w/ 54-in. Mower
Forged 48 in. (121.9 cm) Accel Deep™ Mower	Forged 48 in. (121.9 cm) Accel Deep™ Mower	Forged 48 in. (121.9 cm) Accel Deep™ Mower	Forged 48 in. (121.9 cm) Accel Deep™ Mower
54 in. (137.2 cm) High Capacity	54 in. (137.2 cm) High Capacity	54 in. (137.2 cm) High Capacity	54 in. (137.2 cm) High Capacity
60 in. (152.4 cm) High Capacity	60 in. (152.4 cm) High Capacity	60 in. (152.4 cm) High Capacity	60 in. (152.4 cm) High Capacity
4 year / 700 hours	4 year / 700 hours	4 year / 700 hours	4 year / 700 hours



Specifications

X570 / X580

X584 / X590

X330 / X350

X354 (4WS) / X370

ENGINE

Model Number	FR730V iTorque™ Power System	FR730V iTorque™ Power System / FR730V EFI iTorque™ Power System	44J6 Cyclonic / FR651V iTorque™ Power System	FR651V iTorque Power System
Engine Power	24 hp* (17.9 kW)	24 hp* (17.9 kW) / 25.5 hp* (19.0 kW)	22 hp* (16.4 kW) / 21.5 hp* (16.0 kW)	21.5 hp* (16.0 kW)
Displacement	44.3 cu in. (726 cc)	44.3 cu in. (726 cc)	44.2 cu in. (724 cc) / 44.3 cu in. (726 cc)	44.3 cu in. (726 cc)
Cooling	Air	Air	Air	Air
Governor	Mechanical	Mechanical / Electronic throttle control	Mechanical	Mechanical
Cylinder Configuration	V-twin	V-twin	V-twin	V-twin
Electrical System	12 volts, 12 amp regulated	12 volts, 12 amp regulated / 12 volts, 24 amp regulated	12 volts, 14 amp regulated / 12 volts, 12 amp regulated	12 volts, 12 amp regulated

SLOPE

Slope Operating Limit***	15 degrees	15 degrees	15 degrees	15 degrees
--------------------------	------------	------------	------------	------------

DASH DISPLAY

Fuel Gauge	Yes	Yes	Yes	Yes
------------	-----	-----	-----	-----

FUEL SYSTEM

Fuel Tank Capacity	4.4 U.S. gal. (16.7 L)	4.4 U.S. gal. (16.7 L)	3.3 U.S. gal. (12.5 L)	3.3 U.S. gal. (12.5 L)
--------------------	------------------------	------------------------	------------------------	------------------------

TRANSMISSION

Forward Speed	0-7.2 mph (0-11.6 km/h)	0-7.2 mph (0-11.6 km/h)	0-5.5 mph (0-8.9 km/h)	0-5.5 mph (0-8.9 km/h) / 0-5.8 mph (0-9.3 km/h)
Reverse Speed	0-5.2 mph (0-8.4 km/h)	0-5.2 mph (0-8.4 km/h)	0-4 mph (0-6.4 km/h)	0-4 mph (0-6.4 km/h) / 0-3.5 mph (0-5.6 km/h)

STEERING:

	Low effort, 2-wheel steer / Power, 2-wheel steer	Power, 4-wheel steer / Power, 2-wheel steer	Low effort, 2-wheel steer	Low effort, 4-wheel steer / Power, 2-wheel steer
Tilt Wheel	No	Yes, 5 position	No	No
Front Axle	Cast iron	Cast iron	Cast iron	Cast iron

TURNING RADIUS

	16 in. (40.6 cm) / 22 in. (55.9 cm)	19 in. (48.3 cm) / 22 in. (55.9 cm)	16 in. (40.6 cm)	15 in. (38.1 cm) / 22 in. (55.9 cm)
--	-------------------------------------	-------------------------------------	------------------	-------------------------------------

UNCUT CIRCLE RADIUS

	23 in. (58 cm) w/48A Mower or 20 in. (51 cm) w/54A Mower / 24 in. (61 cm) w/54A Mower	15 in. (38 cm) w/48A Mower or 12 in. (30 cm) w/54A Mower / 27 in. (69 cm) w/48A Mower or 24 in. (61 cm) w/54A Mower	26 in. (66 cm) w/42A Mower or 21 in. (53 cm) w/48A Mower	15 in. (38 cm) w/42A Mower a / 30 in. (76 cm) w/42A Mower
--	---	---	--	---

SEAT

Style	15 in. (38.1 cm) open back with grasp / 21 in. (53.3 cm) cut and sewn	21 in. (53.3 cm) cut and sewn	15 in. (38.1 cm) open back w/ grasp	18-inch (45.7 cm) cut-and-sewn
-------	---	-------------------------------	-------------------------------------	--------------------------------

LIFT SYSTEM

Type	Foot pedal with adjustable spring assist / Hydraulic	Hydraulic	Foot pedal (42A Mower) / Foot pedal with spring assist (48A Mower)	Foot pedal/ Hydraulic
------	--	-----------	--	-----------------------

TIRES

Type	Turf (front and rear) / Turf (front), and Heavy-Duty All-Purpose (rear)	Turf (front and rear) / Turf (front), and Heavy-Duty All-Purpose (rear)	Turf	Turf
Front	15x6.5-8 / 16x6.5-8	16x6.5-8	15x6-6	15x6-6
Rear	24x12-12 / 24x12-12	24x9.5-12 / 24x12-12	20x10-8	20x10-10 / 20X10-8

DIMENSIONS

Height	45 in. (114.3 cm)	52.25 in. (132.7 cm)	46 in. (117 cm)	49 in. (124 cm)
Wheelbase	51.2 in. (130 cm)	51.2 in. (130 cm)	49.4 in. (125 cm)	49.4 in. (125 cm)
Overall Length	75 in. (191 cm) / 79 in. (201 cm)	79 in. (201 cm)	72 in. (183 cm)	72 in. (183 cm)

Min. Storage Width (Deflector Up)	53.6 in. (136 cm) w/48 in. Accel Deep or 59.4 in. (151 cm) w/54 in. Accel Deep	53.6 in. (136 cm) w/48 in. Accel Deep or 59.4 in. (151 cm) w/54 in. Accel Deep	50.5 in. (128 cm) w/42 in. Accel Deep or 53.6 in. (136 cm) w/48 in. Accel Deep	50.5 in. (128 cm) w/42 Accel Deep Mower
Weight, Tractor (no fuel) and Mower	748 lb (339 kg) w/48 in. Accel Deep, 756 lb (343 kg) w/54 in. Accel Deep / 787 lb (357 kg) w/54 in. Accel Deep	837 lb (380 kg) w/48 in. Accel Deep or 845 lb (383 kg) w/54 in. Accel Deep / 797 lb (362 kg) w/48 in. Accel Deep or 805 lb (365 kg) w/54 in. Accel Deep	542 lb (246 kg) w/42 in. Accel Deep or 606 lb (275 kg) w/48 in. Accel Deep / 543 lb (246 kg) w/42 in. Accel Deep or 607 lb (275 kg) w/48 in. Accel Deep	623 lb (283 kg) w/42 in. mower / 570 lb (259 kg) w/42 in. mower

MOWER DECK OPTIONS

	48 in. Accel Deep™ or 54 in. Accel Deep / 54 in. Accel Deep	48 in. Accel Deep or 54 in. Accel Deep	42 in. Accel Deep or 48 in. Accel Deep / 42 in. Accel Deep, 42 in. Edge Mulch, or 48 in. Accel Deep	42 in. Accel Deep
Cutting Width /Blades	48 in. (122 cm) 3 blades or 54 in. (137 cm) 3 blades / 54 in. (137 cm) 3 blades	48 in. (122 cm) 3 blades or 54 in. (137 cm) 3 blades	42 in. (107 cm) 2 blades or 48 in. (122 cm) 3 blades	42 in. (107 cm) 2 blades

BUMPER-TO-BUMPER WARRANTY**

	4 year/500 hours	4 year/500 hours	4 year/300 hours	4 year/300 hours
--	------------------	------------------	------------------	------------------

* The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information.

** Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or www.JohnDeere.ca/TUWarranty for details.

*** Attachments may reduce Slope Operating Limit. See Operator's Manual.

X380

X384 (4WS) / X390 / X394

X350R

S220

S240

FR69iV iTorque Power System	FR69iV iTorque Power System	FR65iV iTorque Power System	44J6 Cyclonic	FR65iV
23 hp* (17.2 kW)	23 hp* (17.2 kW)	21.5 hp* (16 kW)	22 hp* (16.4 kW)	21.5 hp* (16.0 kW)
44.3 cu in. (726 cc)	44.3 cu in. (726 cc)	44.3 cu in. (726 cc)	44.2 cu in. (724 cc)	44.3 cu in. (726 cc)
Air	Air	Air	Air	Air
Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
V-twin	V-twin	V-twin	V-twin	V-twin
12 volts, 12 amp regulated	12 volts, 12 amp regulated	12 volts, 12 amp regulated	12 volts, 14 amp regulated	12 volts, 12 amp regulated
15 degrees	15 degrees	15 degrees	13 degrees	13 degrees
Yes	Yes	Low fuel indicator	Mechanical	Easy-read on dash
3.3 U.S. gal. (12.5 L)	3.3 U.S. gal. (12.5 L)	2 U.S. gal. (7.6 L)	2.4 U.S. gal. (9.1 L)	2.4 U.S. gal. (9.1 L)
0-6.2 mph (0-10 km/h)	0-5.9 mph (0-9.5 km/h) / 0-6.2 mph (0-10.0 km/h) / 0-6.2 mph (0-10.0 km/h)	0-5.3 mph (0-8.5 km/h)	0-5.5 mph (0-8.9 km/h)	0-5.5 mph (0-8.9 km/h)
0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)	0-4 mph (0-6.4 km/h)	0-3.2 mph (0-5.2 km/h)	0-3.2 mph (0-5.2 km/h)
Low effort, 2-wheel steer	Low effort, 4-wheel steer / Power, 2 wheel steer / Power, 4-wheel steer	Low effort, 2-wheel steer	Low effort, 2-wheel steer	Low effort, 2-wheel steer
No	No/Yes/Yes	No	No	No
Cast iron	Cast iron	Cast iron	Cast iron	Cast iron
16 in. (40.6 cm)	15 in. (38.1 cm) / 22 in. (55.9 cm) / 19 in. (48.3 cm)	16.5 in. (42 cm)	18 in. (46 cm)	18 in. (46 cm)
21 in. (53 cm) w/48A Mower or 18 in. (46 cm) w/54A Mower	9 in. (23 cm) w/48A Mower / 24 in. (61 cm) w/48A Mower or 22 in. (56 cm) w/54A Mower / 15 in. (38 cm) w/48A Mower	Right 23 in. (58 cm), Left 28 in. (71 cm) with 42R Mower	24 in. (61 cm) w/42A Mower	24 in. (61 cm) w/42A Mower or 18.5 in. (47 cm) w/48A Mower
18 in. (45.7 cm) cut-and-sewn	18 in. (45.7 cm) cut-and-sewn	15 in. (38.1 cm) open back w/ grasp	15 in. (38.1 cm) open back	15 in. (38.1 cm) open back w/ grasp
Foot pedal with spring assist	Foot pedal with spring assist / Hydraulic / Hydraulic	Foot pedal with spring assist	Hand lever with spring assist	Hand lever with spring assist
Turf	Turf	Turf	Turf	Turf
15x6.5-8	15x6-6 / 15x6.5-8 / 15x6.5-8	15x6-6	15x6-6	15x6-6
22x11-10	20x10-10 / 22x11-10 / 22x9.5-12	20x10-8	20x10-8	20x10-8
49 in. (124 cm)	49 in. (124 cm)	46 in. (117 cm)	45 in. (114 cm)	45 in. (114 cm)
49.4 in. (125 cm)	49.4 in. (125 cm) / 49.4 in. (125 cm) / 51.2 in. (130 cm)	49.4 in. (125 cm)	48.9 in. (124.2 cm)	48.9 in. (124.2 cm)
72 in. (183 cm)	72 in. (183 cm) / 72 in. (183 cm) / 74 in. (188 cm)	99 in. (251.4 cm)	75 in. (191 cm)	75 in. (191 cm)
53.6 in. (136 cm) w/48 in. Accel Deep Mower or 59.4 in. (151 cm) w/54 in. Accel Deep Mower	53.6 in. (136 cm) w/48 in. Accel Deep Mower / 53.6 in. (136 cm) w/48 in. Accel Deep Mower or 59.4 in. (151 cm) w/54 in. Accel Deep Mower / 53.6 in. (136 cm) w/48 in. Accel Deep Mower	43.8 in. (111 cm) with 42 in. rear discharge, rear collect mower	49 in. (124 cm) w/42A Mower	49 in. (124 cm) w/42A Mower or 54 in. (137 cm) w/48A Mower
651 lb (295 kg) w/48 in. mower or 659 lb (299 kg) w/54 in. mower	700 lb (318 kg) w/48 in. mower / 678 lb (308 kg) w/48 in. mower or 686 lb (311 kg) w/54 in. mower / 755 lb (342 kg) w/48 in. mower	646 lb (293 kg) w/42 in. mower	481 lb (218 kg) w/42A 517 lb (234 kg) w/48A	486 lb (220 kg) w/42A or 522 lb (237 kg) w/48A
48 in. Accel Deep or 54 in. Accel Deep	48 in. Accel Deep / 48 in. Accel Deep or 54 in. Accel Deep / 48 in. Accel Deep	42 in. rear discharge and collect with standard mulch plug	42- or 48-in. (107- or 122-cm) Accel Deep mower deck	42- or 48-in. (107- or 122-cm) Accel Deep mower deck
48 in. (122 cm) 3 blades or 54 in. (137 cm) 3 blades	48 in. (122 cm) 3 blades / 48 in. (122 cm) 3 blades or 54 in. (137 cm) 3 blades / 48 in. (122 cm) 3 blades	42 in. (107 cm) 2 blades	42 in. (107 cm) 2 blades or 48 in. (122 cm) 3 blades	42 in. (107 cm) 2 blades or 48 in. (122 cm) 3 blades
4 year/300 hours	4 year/300 hours	4 year/300 hours	3 year/200 hours	3 year/200 hours

Specifications

S100

S110

**S120 /
S130**

S140

S160

**S170 /
S180**

ENGINE

Horsepower*	17.5 hp (13.0 kW)	19.0 hp (14.2 kW)	22 hp (16.4 kW)	22 hp (16.4 kW)	24 hp (17.9 kW)	24 hp (17.9 kW)
Cylinders	One	One	V-twin	V-twin	V-twin	V-twin
Displacement	30.5 cu in. (500 cc)	33 cu in. (540 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)
Oil Filter	Traditional	Traditional	John Deere Easy Change™ 30-Second Oil Change System***	Traditional	John Deere Easy Change™ 30-Second Oil Change System***	John Deere Easy Change™ 30-Second Oil Change System***
Air Filter	Cartridge	Cartridge	Cartridge	Cartridge	Cartridge with prefilter	Cartridge with prefilter

SLOPE

Slope Operating Limit****	13 degrees	13 degrees	13 degrees	13 degrees	13 degrees	13 degrees
---------------------------	------------	------------	------------	------------	------------	------------

MOWER DECK

Cut Width	42 in. (107 cm)	42 in. (107 cm)	42 in. (107 cm)	48 in. (122 cm)	48 in. (122 cm)	48 in. (122 cm) / 54 in. (137 cm)
Cutting Blades	Two	Two	Two	Three	Three	Three
Cut Height	1 to 4 in. (2.5 to 10.2 cm)	1 to 4 in. (2.5 to 10.2 cm)	1 to 4 in. (2.5 to 10.2 cm)	1 to 4 in. (2.5 to 10.2 cm)	1 to 4 in. (2.5 to 10.2 cm)	1 to 4 in. (2.5 to 10.5 cm)
Mower Deck Material	Stamped steel	Stamped steel	Stamped steel	Stamped steel	Stamped steel	Stamped steel
Blade Engagement / PTO	Manual	Manual	Manual / Electric	Electric	Electric	Electric

TRANSMISSION

Type	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
------	-------------	-------------	-------------	-------------	-------------	-------------

TURNING RADIUS

Turning Radius	18 in. (46 cm)	18 in. (46 cm)	18 in. (46 cm)	18 in. (46 cm)	18 in. (46 cm)	18 in. (46 cm)
----------------	----------------	----------------	----------------	----------------	----------------	----------------

ELECTRICAL SYSTEM

Capacity	8 amp	8 amp	8 amp	8 amp	14 amp	14 amp
----------	-------	-------	-------	-------	--------	--------

FUEL SYSTEM

Fuel Gauge	Mechanical	Mechanical	Easy-read on dash	Mechanical	Easy-read on dash	Easy-read on dash
Fuel Tank Capacity	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)
Type of Fuel	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel Filter	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line

TRAVEL SPEED

Forward	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)
Reverse	0-3.2 mph (5.2 km/h)	0-3.2 mph (5.2 km/h)	0-3.2 mph (5.2 km/h)	0-3.2 mph (5.2 km/h)	0-3.2 mph (5.2 km/h)	0-3.2 mph (5.2 km/h)

SEAT

Height	11 in. (27.9 cm)	15 in. (38.1 cm) open back	15 in. (38.1 cm) open back	15 in. (38.1 cm) open back	15 in. (38.1 cm) open back	15 in. (38.1 cm) open back
--------	------------------	-------------------------------	-------------------------------	-------------------------------	-------------------------------	-------------------------------

TIRES

Front	15x6-6	15x6-6	15x6-6	15x6-6	15x6-6	16x6.5-8
Rear	20x8-8	20x8-8	20x8-8 / 20x10-8	20x8-8	20x10-8	22x9.5-12

DIMENSIONS

Overall Length	69.7 in. (177 cm)	69.7 in. (177 cm)	69.7 in. (177 cm) / 74.2 in. (188 cm)	69.7 in. (177 cm)	74.9 in. (190 cm)	75.3 in. (191 cm)
Overall Width (deflector down)	55.2 in. (140 cm)	55.2 in. (140 cm)	55.2 in. (140 cm)	60.8 in. (154 cm)	60.8 in. (154 cm)	60.8 in. (154 cm) / 67.0 in. (170 cm)
Height	40.2 in. (102 cm)	44.5 in. (113 cm)	44.5 in. (113 cm) / 45 in. (114 cm)	44.5 in. (113 cm)	45.3 in. (115 cm)	45.7 in. (116 cm)
NET WEIGHT (NO FUEL)	414 lb (188 kg)	414 lb (188 kg)	444 lb (201 kg) / 462 lb (210 kg)	468 lb (212 kg)	481 lb (218 kg)	503 lb (228 kg) / 526 lb (239 kg)

MISCELLANEOUS

Cruise Control	No	No	Yes	No	Yes	Yes
Front Bumper	Optional	Optional	Optional / Standard	Standard	Standard	Standard
Steering Wheel	Standard, 12 in. (30.48 cm)	Standard, 12 in. (30.48 cm)	Standard, 12 in. (30.48 cm)	Standard, 12 in. (30.48 cm)	Standard, 12 in. (30.48 cm)	Standard, 12 in. (30.48 cm)
Storage Compartment	Storage w/cover	Storage w/cover	Storage w/cover	Storage w/cover	Storage w/cover	Storage w/cover

BUMPER-TO-BUMPER WARRANTY**

Warranty	2 year / 120 hours	2 year / 120 hours	2 year / 120 hours	2 year / 120 hours	2 year / 120 hours	2 year / 120 hours
----------	--------------------	--------------------	--------------------	--------------------	--------------------	--------------------

* The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information.

** Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or www.JohnDeere.ca/TUWarranty for details.

*** Changing the filter removes the captured contaminants and replaces about 0.8 qt (0.76 L) of engine oil.

**** Attachments may reduce Slope Operating Limit. See Operator's Manual.

Attachments

X700 SERIES X500 SERIES X300 SERIES 200 SERIES 100 SERIES

SNOW EQUIPMENT

52-in. (132-cm) Quick-Hitch Rotary Broom	X				
60-in. (152-cm) Heavy-Duty Rotary Broom	X				
44-in. (112-cm) Snow Blower		X	X	X	X
47-in. (119-cm) Snow Blower		X			
47-in. (119-cm) Quick-Hitch Snow Blower	X				
54-in. (137-cm) Quick-Hitch Snow Blower	X				

FRONT BLADES

44-in. (112-cm) Front Blade			X		
46-in. (117-cm) Front Blade				X	X
48-in. (122-cm) Front Blade		X	X		
54-in. (137-cm) Quick-Hitch Front Blade	X				
60-in. (152-cm) Quick-Hitch Front Blade	X				

MULCH ATTACHMENTS

Mulch Kits	X				X
MulchControl™ kit	X	X	X	X	

MATERIAL COLLECTION SYSTEMS

2-bag, 6.5-bu (229-L) Rear Bagger				X	X
2-bag, 7-bu (247-L) Rear Bagger			X		
3-bag, 14-bu (493-L) Rear Bagger	X	X			
19-bu (670-L) MC519 Power Flow Cart	X	X	X		
Front Thatcher	X	X	X		

WEATHER ENCLOSURES AND CANOPY

Weather Enclosure	X	X	X	X	X
Sun Canopy		X	X	X	X
ROPS Hard-Side Cab	X				

REAR MOUNTED ATTACHMENTS

Bucket Holder	X	X	X	X	X
Mounted Spreader	X	X	X		
Frontier BB2048L Box Blade	X				
Frontier RB2060L Rear Blade, 5 ft (1.52 m)	X				
Frontier LR2060L Landscape Rake, 5 ft (1.52 m)	X				
647 Rotary Tiller, 3 point, 540-rpm PTO	X				

SPRAYERS

15 U.S. gal. (56.8 L) Tow-Behind	X	X	X	X	X
25 U.S. gal. (94.6 L) Tow-Behind	X	X	X	X	X
45 U.S. gal. (170.3 L) Tow-Behind	X	X			
60 U.S. gal. (227.1 L) Tow-Behind	X	X			
25 U.S. gal. (94.6 L) Mounted	X	X	X		
45 U.S. gal. (170.3 L) 3-Point	X				

TOW-BEHIND EQUIPMENT

40-in. (102-cm) Thatcherer	X	X	X	X	X
36-in. (91-cm) Lawn Roller	X	X	X	X	X
48-in. (122-cm) Wide Steel Roller	X	X			
40-in. (102-cm) Plug Aerator/Thatcher Multi-Tool	X	X	X	X	X
40-in. (102-cm) Spiker Aerator	X	X	X	X	X
40-in. (102-cm) Aerator/Spreader	X	X	X	X	X
42-in. (107-cm) Lawn Sweeper	X	X	X	X	X
44-in. (112-cm) Lawn Sweeper	X	X	X	X	X
40-in. (102-cm) Plug Aerator	X	X	X	X	X
48-in. (122-cm) Plug Aerator	X	X			
Broadcast Spreaders	X	X	X	X	X

UTILITY CARTS**

7P Utility Cart	X	X	X	X	X
8Y Utility Cart	X	X	X	X	X
10P Utility Cart	X	X	X	X	X
10PX Utility Cart	X	X	X	X	X
13 Steel Utility Cart	X	X	X	X	X
16YS Swivel Poly Utility Cart	X	X	X	X	X
17P Utility Cart	X	X	X	X	X
40-in. (102-cm) Tractor Shovel		X	X		
54-in. (137-cm) Tractor Shovel	X				

* Not all attachments fit on all models within Series.

**The loaded weight of the utility cart not to exceed the weight of the tractor and operator.



Snow Blower



2-bag Power Flow Bagger



Lawn Sweeper



MulchControl™ System



Utility Cart



Committed turf experts dig into what you need. Factory-trained service and parts professionals ensure that your equipment keeps working as hard as you do. So, let's get to work, together.

*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the manufacturer's website for additional information.

This literature has been compiled for worldwide circulation. Features, specifications, and attachments subject to change without notice. While general information, pictures, and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options, and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specifications, design, and price of the products described in this literature without notice. John Deere, the leaping deer symbol, and green and yellow trade dress are trademarks of Deere & Company.



9351251 (25-10)

JohnDeere.com
JohnDeere.ca

